

# **G & R Casters and Wheels**

1104 Commercial Avenue  
Charlotte, NC 28205

Phone (704) 358-8787 Fax (704) 358-8788  
e-mail: info@GandRcasters.com

## 15 Series Light Duty Casters:

Capacity up to 140 pounds.

### Standard Features

- Bolt Size - 5/16"
- All Raceways are hardened.
- Top Plate Size - 2-3/4" X 3-3/4"
- Axle - 5/16" diameter hollow axle with lock nut.
- Wheel Bearings - Straight roller, Ball, Oilex, Derlin.
- Bolt Hole Specifications - 1-3/4" X 2-3/4" slotted to 3".
- Corrosion resistant Zinc plated parts (Wheels excluded).

### Available Options:

- Brakes
- Threadguards
- Sealed Swivel Raceways / Dust Cover
- Wheels with Ball Bearings -- Bore Size - 5/16"




WHEEL			Capacity in pounds	Bearing	Overall Height	Part Number	
Diameter	Width	Type				Swivel	Rigid
3"	7/8"	Polyolefin	125	Plain Bore	3-3/4"	15-POW-03014-S	15-POW-03014-R
		Rubber on Poly	125	Plain Bore		15-RPW-03014-S	15-RPW-03014-R
		Poly on Poly	100	Plain Bore		15-PPW-03014-S	15-PPW-03014-R
4"	7/8"	Polyolefin	130	Plain Bore	4-3/4"	15-POW-04014-S	15-POW-04014-R
		Rubber on Poly	130	Plain Bore		15-RPW-04014-S	15-RPW-04014-R
		Poly on Poly	130	Plain Bore		15-PPW-04014-S	15-PPW-04014-R
5"	7/8"	Polyolefin	140	Plain Bore	5-3/4"	15-POW-05014-S	15-POW-05014-R
		Rubber on Poly	140	Plain Bore		15-RPW-05014-S	15-RPW-05014-R
		Poly on Poly	140	Plain Bore		15-PPW-05014-S	15-PPW-05014-R

- Capacity ratings are based on manual operation.


G & R Casters and Wheels reserves the right to change the design, at any time, for improvement of the product without incurring any obligation to make such changes on products.

### **Stem Sizes-Thread Styles**

Thread Diameters: 1/2"X13NC-1", 1/2"X13NC-1-1/2"



A (OAH)	4"	5"	6-1/16"
B (ODxWidth)	3"x1-1/4"	4"x1-1/4"	5"x1-1/4"

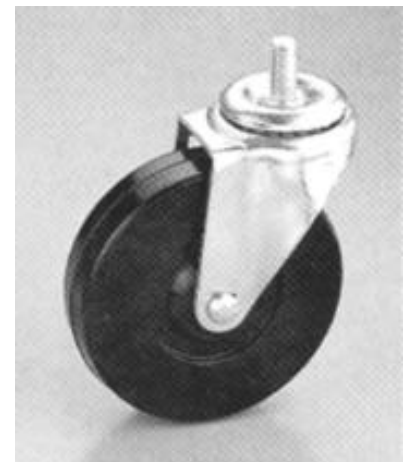

For other sizes please contact your factory rep.

**"QUALITY IS OUR TOP PRIORITY"**