

G & R Casters and Wheels

1104 Commercial Avenue
Charlotte, NC 28205

Phone (704) 358-8787 Fax (704) 358-8788
e-mail: info@GandRcasters.com

37 Series - Textile Casters

Capacity up to 1000 pounds.

Standard Features:

- Legs: 1/4" thick steel.
- All races are lubricated.
- Top plate size: 5"X5-1/2"X1/4".
- Hollow Axle with grease fitting in it and Jam lock nut.
- Corrosion resistant Zinc plated parts (Wheels excluded).
- Bolt Hole Specifications: 4-1/8"X4-1/2"X3". Bolt size: 3/8".
- 5/8" diameter hydraulically pressed Rivet construction.

Distinct Standard Features:

- **All raceways are heat treated.**
- **Grease fitting in the wheels, swivel sections, and hollow axles.**

Available options:



- Sealed swivel raceways.
- Thread guards on most casters.



WHEEL			Capacity in pounds	Bearing	Overall Height	Part Number	
Diameter	Width	Type				Swivel	Rigid
6"	2"	Phenolic	1000	Roller	7-1/2"	37-PHW-0620-S	37-PHW-0620-R
		Polyurethane on Cast Iron	900	Roller		37-PUW-0620-S	37-PUW-0620-R
		Solid Polyurethane	900	Roller		37-SPW-0620-S	37-SPW-0620-R
		Solid Elastomer	1000	Ball		37-SEW-0620-S-BB	37-SEW-0620-R-BB
8"	2"	Phenolic	1000	Roller	9-1/2"	37-PHW-0820-S	37-PHW-0820-R
		Polyurethane on Cast Iron	1000	Roller		37-PUW-0820-S	37-PUW-0820-R
		Solid Polyurethane	900	Roller		37-SPW-0820-S	37-SPW-0820-R
		Solid Elastomer	1000	Ball		37-SEW-0820-S-BB	37-SEW-0820-R-BB

~ Capacity ratings are based on manual operation.

G & R Casters and Wheels reserves the right to change the design, at any time, for improvement of the product without incurring any obligation to make such changes on products.

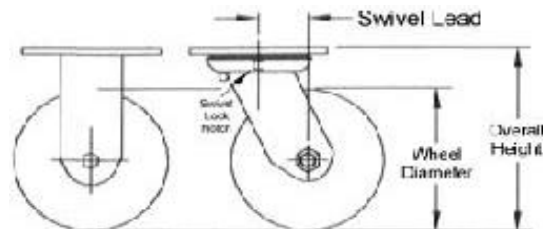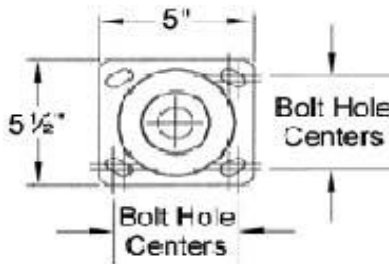

39 Series - Scaffold Caster (SC)

Standard Features:

- Rivet construction
- Legs: 1/4" thick steel
- Axle with grease fitting and lock nut.
- Corrosion resistant Zinc plated parts (Wheels excluded).

Available Options:

- 1/4" thick steel yoke base is spoke design for better traction
- All raceways are heat treated.
- Grease fitting in wheels, swivel sections, and axles.



Wheel			Part Number	Capacity (in pounds)
Diameter	Width	Hub Length		
6"	2"	2-3/16"	39-MRW-0620-S-SC	410
8"	2"	2-3/16"	39-MRW-0820-S-SC	500

"QUALITY IS OUR TOP PRIORITY"