HAMMER FLOOR LOCKS

e-mail: info@GandRcasters.com

Only available through G & R *Casters and Wheels*

1104 Commercial Avenue; Charlotte, NC 28205; TEL (704) 358-8787 / FAX (704) 358-8788

This lock has been designed to perform perfect position hold both simply and safely.

Light but strong.

Easy operation

Outstanding performance.

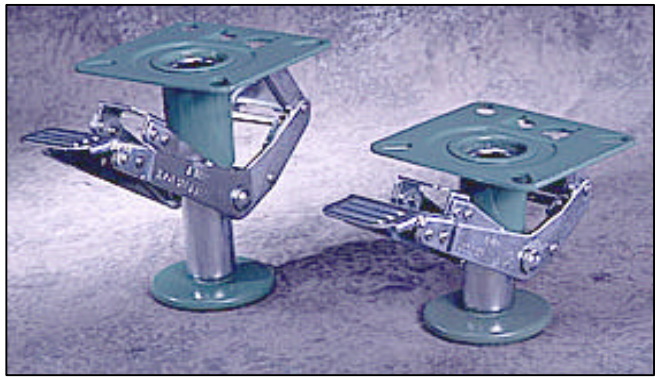

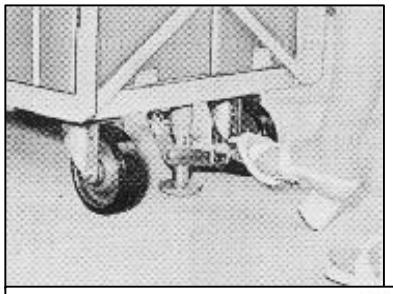

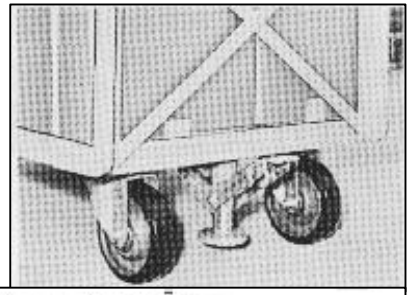

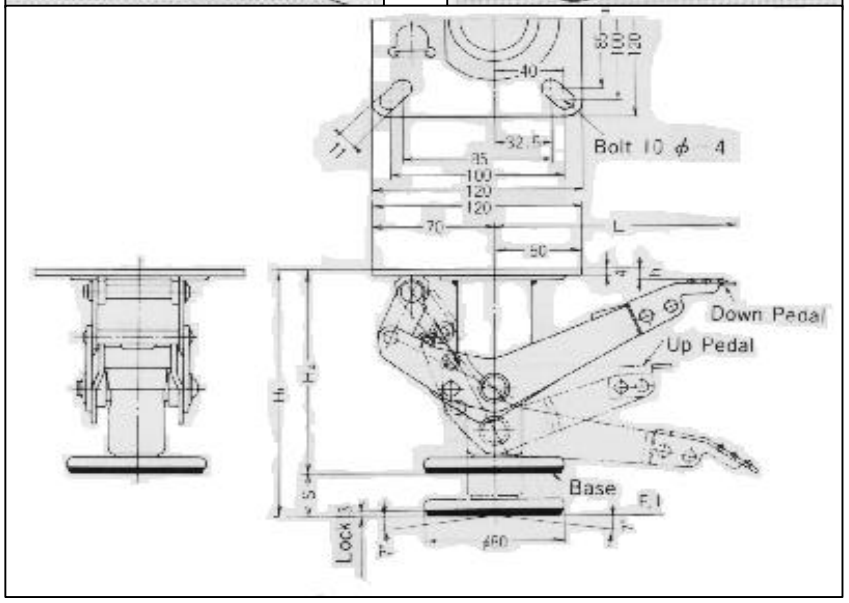

Operating instructions (for safe operation)

Press the down pedal to the bottom. Then the base position will be set, with the bogey 5mm from the ground.

The up pedal will be above the down pedal; this is the perfect lock position.

Unlocking (up pedal)

Press the up pedal until it is level with the down pedal., and release. The base will be raised to release.

Catalog No.	Normal No.	L Proper Mounting height (m/m)	H1 Extended height (m/m)	H2 Re-tracted height (m/m)	S Strok (m/m)	Mounting Hole spacing (m/m)	Unit Weight (kg)	Load Capacity (kg)
900-2	100	142	150	125	25	85 X 85 100 X 100	1.6	200
900-4	150	202	210	170	40	85 X 85 100 X 100	1.8	300