


# **G & R** *Casters and Wheels*

1104 Commercial Avenue  
Charlotte, NC 28205

Phone (704) 358-8787 Fax (704) 358-8788  
e-mail: [info@GandRcasters.com](mailto:info@GandRcasters.com)

## Phenolic Wheels - PHW:

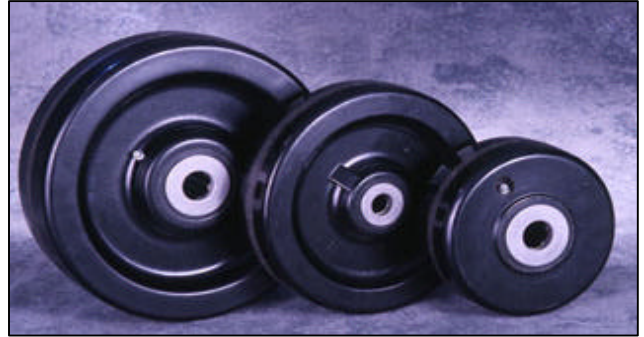

- Shock resistant.
- Roller bearing for easy operation.
- Non-marking floor protection compound.
- Molded with macerated canvas and Phenolic resin compounds.
- Operated temperatures: minus 65 to plus 300 degrees Fahrenheit.

Wheel			Bearing		Part Number	~Capacity (in pounds)
Diameter	Width	Hub Length	Type	Size		
4"	2"	2-3/16"	----	1-3/16"	PHW-0420-19	800
			Roller	3/4"	PHW-0420-12	
			Roller w/Spanner	1/2"	PHW-0420-08	
5"	2"	2-3/16"	----	1-3/16"	PHW-0520-19	1000
			Roller	3/4"	PHW-0520-12	
			Roller w/Spanner	1/2"	PHW-0520-08	
6"	2"	2-3/16"	----	1-3/16"	PHW-0620-19	1200
			Roller	3/4"	PHW-0620-12	
			Roller w/Spanner	1/2"	PHW-0620-08	
8"	2"	2-3/16"	----	1-3/16"	PHW-0820-19	1400
			Roller	3/4"	PHW-0820-12	
			Roller w/Spanner	1/2"	PHW-0820-08	
8"	2-1/2"	2-3/4"	----	1-15/16"	PHW-0825-31	2000
			Roller	1"	PHW-0825-16	
			Roller w/Spanner	3/4"	PHW-0825-12	
8"	3"	3-1/4"	----	1-15/16"	PHW-0830-31	2500
			Roller	1"	PHW-0830-16	
			Roller w/Spanner	3/4"	PHW-0830-12	
10"	2-1/2"	2-3/4"	----	1-15/16"	PHW-1025-31	2300
			Roller	1"	PHW-1025-16	
			Roller w/Spanner	3/4"	PHW-1025-12	
10"	3"	3-1/4"	----	1-15/16"	PHW-1030-31	3000
			Roller	1"	PHW-1030-16	
			Roller w/Spanner	3/4"	PHW-1030-12	
			Tapered	3/4"	PHW-1030-12-TB	

~ Capacity ratings are based on manual operation.

Other sizes are available - Tapered bearings are available on other sizes. Please contact your factory rep.

**"QUALITY IS OUR TOP PRIORITY"**